



Optional shoulder harness for greater portability



Adjustable viewing angle



Remote capabilities with the buttons on the antenna




Fully supports the MALÅ HF (High Frequency) antenna range

1. Portable, in-the-box concept

2. Integrated control unit and interface/display with powerful software

4. Durable transparent survey sheet

3. High frequency antenna

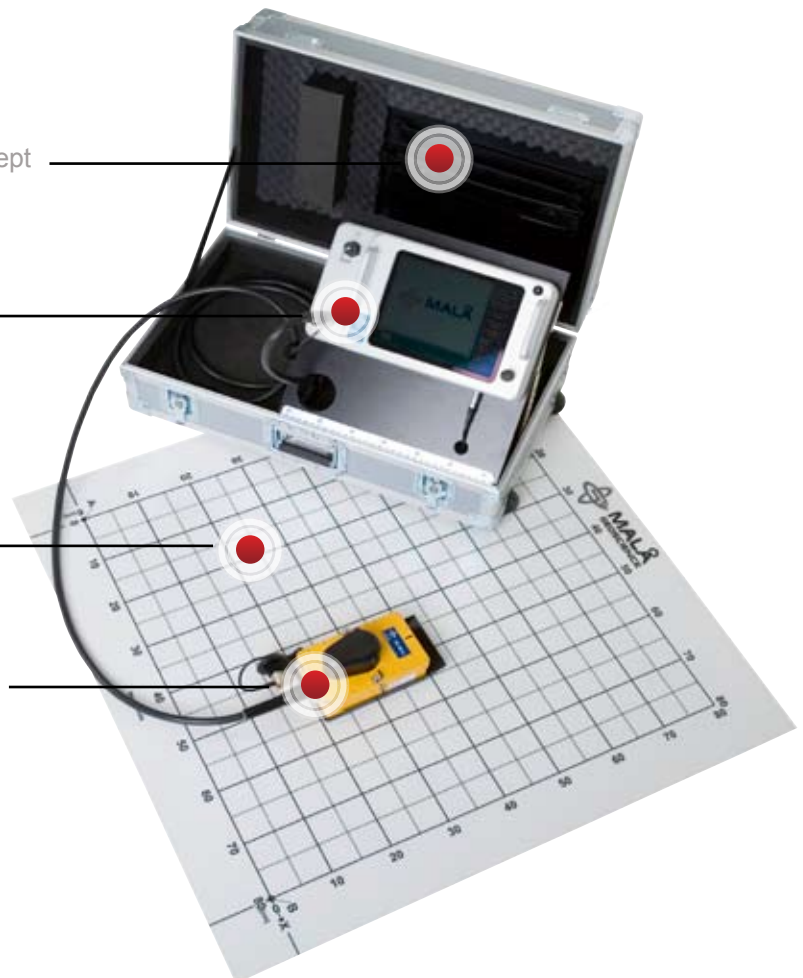

MALÅ CX System

Ground Penetrating Radar for Structural Investigations

The MALÅ CX Concrete Imaging System is an easy to use, Ground Penetrating Radar (GPR) system designed for the non-destructive investigation and imaging of concrete and other structure.

Construction professionals involved in the cutting, coring or drilling of concrete structure require a safe and reliable means of inspecting work areas to locate and identify hidden features that could cause damage to machinery, or pose a danger to the operator or the structure itself during these activities.

The MALÅ CX system allows you to scan concrete structure simply and safely in three different measurement modes; 2D-, 3D Grid- and Object Mapper- projects and present data clearly for real-time and in-the-box data acquisition, display and analysis. It is a quicker, safer and more cost effective option than competing systems or traditional radiographic testing methods.

With its simple user interface and large number of software features, the MALÅ CX System offers a unique powerful choice for your high frequency GPR investigations.

Main Applications


The MALÅ CX system is the tool of choice for those who need to quickly and easily investigate areas prior to cutting, coring or drilling. Other applications include:

- Concrete / Structure inspection
- Measure depth of cover or slab thickness
- Measure layer thickness
- Locate and map reinforcing support structure
- Locate non-metallic features, i.e. heating / water pipes
- Quality assessment & control
- Void detection

Specific Features

The product's simple yet ergonomic and field rugged design, intuitive user interface and clear display is testament to its success and it remains as the number one choice in its field.

- Minimal set-up for fast start-up
- Quick and simple one button operation
- Three measurements modes; 2D-, 3D Grid-, Obejct Mapper- projects.
- In-the-box processing and 2.5D imaging analysis
- Supports EM (50/60Hz) functionality
- Real time locates with back-up cursor for quick and accurate
- Full remote capabilities with the buttons on the antenna



System Configuration

The MALÅ CX system comes as standard in a portable field rugged case, but can also be used in conjunction with an optional shoulder harness for greater portability and flexibility of use, depending on the application and user requirements.

The MALÅ CX system was the World's first to combine GPR with the more common Electro-Magnetic (EM) technology by way of a fully integrated 50/60Hz sensor. This combination allows the detection of both metallic and non metallic objects and features, but also aids in the detection and location of metallic conductors energized with 50/60 Hz energy within the structure under investigation; thereby offering an additional element of safety to the system.

Technical Specification

- Power supply:** External 12V or Li-Ion 12V/12Ah battery
Operating time: 6h with battery pack
Operating temp: -20° to +50°C or 0° to 120 °F
Environmental: IP65
Display: 10.4" Color TFT Ultra-Hi-Brite or trans-reflective LCD
Dimensions: 74 x 43 x 28 cm / 29" x 17" x 11" (in-the-box)
Weight: 20 kg / 44 lb (total in-the-box, including antenna)
Antennas: The MALÅ CX system fully supports the MALÅ High Frequency (HF) Antenna range allowing the user to choose the best antenna for their given application and obtain unsurpassed accuracy and data clarity.
 See MALÅ High Frequency (HF) Antennas sales sheet.

See our webpage for latest information

Head Office

MALÅ Geoscience AB
 Skolgatan 11, SE-930 70
 Malå, Sweden
 Phone: +46 953 345 50
 Fax: +46 953 345 67
 E-mail: sales@malags.com

Offices

USA: MALÅ Geoscience USA, Inc., 2040 Savage Rd. Box 80430, Charleston, SC 29416
 Phone: +1 843 852 5021, Fax: +1 843 769 7392, E-mail: sales.usa@malags.com

China: MALÅ Geoscience (China), Room 2604, Yuan Chen Xin BLDG, No.12 Yu Min Road Chao Yang District, Beijing 100029
 Phone: +86 10 8225 0728, Fax: +86 10 8225 0815, E-mail: sales@malags.com